

DIREKTNO KOMANDOVANI

TANJIRASTI RAZVODNICI
NAZIVNOG OTVORA 6 mm

TEHNI KI PODACI

Radni pritisak od 0 do 10 bara


Protokni faktor Kv 12 (odnosi se na protok l/min)

Radni fluid preiš en i zauljen vazduh

Dozvoljena temperatura radnog fluida od -15°C do +80°C


NAPOMENA: Osim standardnih izvedbi, mogu se naru it i razvodnici sa bilo kojom vrstom aktivacije odnosno povratka

AKTIVACIJA OSOVINICOM

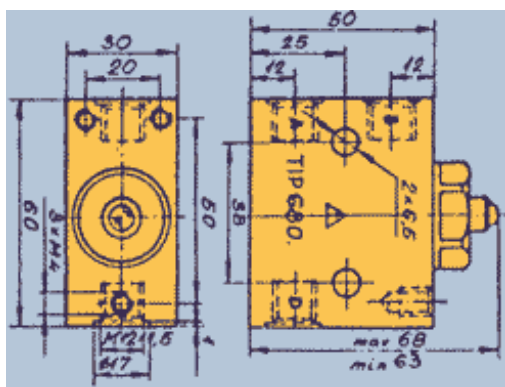

Tip	Funkcija	Aktiviranje	Povratak	Sila aktiviranja (N) pri pritisku od 6 bara
680.1	2/2			68
680.2	2/2			157
680.3	3/2	osovinica	pritisna opruga	68
680.4	3/2			157
680.5	4/2			225
680.6	4/3			137
680.11	2/2			34
680.21	2/2			68
680.31	3/2	taster-to ki	pritisna opruga	34
680.41	3/2			68
680.51	4/2			103
680.61	4/3			68
680.12	2/2			34
680.22	2/2			68
680.32	3/2	pregibni to ki	pritisna opruga	34
680.42	3/2			68
680.52	4/2			103
680.62	4/3			68
680.13	2/2			15
680.23	2/2			30
680.33	3/2	taster-poluga	pritisna opruga	15
680.43	3/2			30
680.53	4/2			45
680.63	4/3			30
680.14	2/2	horizontalna ru ica	pritisna opruga	20
680.34	3/2			20
680.54	4/3	vertikalna ru ica		20
680.64	4/2	horizontalna ru ica		20

TIPOVI RAZVODNIKA

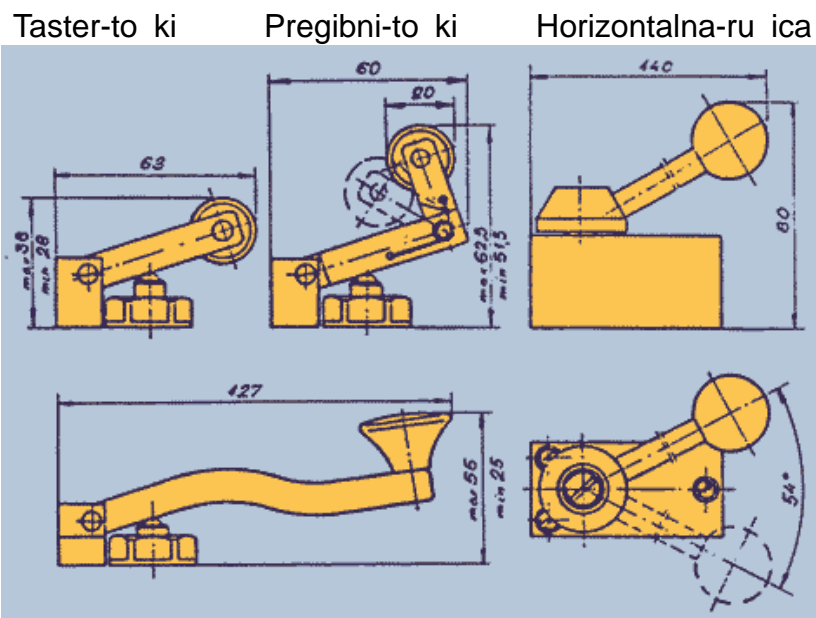

A.D. INSA - INDUSTRIJA SATOVA

Trš anska 21
11080 Beograd - Zemun
Republika Srbija



www.insa.rs



+ 381 (11) 2612 - 422
+ 381 (11) 3713 - 606
+ 381 (11) 3173 - 607
+ 381 (11) 2614 - 330

Fax:

E-mail: office@insa.rs
info@insa.rs